

PREPARATION, CHARACTERIZATION AND MECHANISTIC
STUDY OF ALUMINA SUPPORTED CALCIUM OXIDE
BASED CATALYSTS IN TRANSESTERIFICATION
OF REFINED COOKING OIL

NORHASYIMAH BT MOHD KAMAL

A thesis submitted in fulfilment of the
requirements for the award of the degree of
Doctor of Philosophy (Chemistry)

Faculty of Science
Universiti Teknologi Malaysia

NOVEMBER 2018

*A Special Dedication to my beloved family especially
to:*

*My sweetheart Mohd Norhelmi,
My cute little flower Siti Aisyah Humaira,
My sweet mums Habsah and Sepiah
My handsome dads Mohd Kamal and Samsudin
My supportive sisters Ashikin, Aishah and Aini
My loving brothers Firdaus, Fadzil and Fairuz's
My BFF Nur Fatin*

*For all the love, supports and continues doa to
complete this work*

*"I am the person I am today because of all the people
who have shaped me in every way"*

ACKNOWLEDGEMENTS

In the name of Allah, the Most Gracious, the Most Merciful

Very Special thanks dedicated to my beloved supervisor, Prof. Dr. Wan Azelee Wan Abu Bakar, Dr. Susilawati Toemen and Dr. Rusmidah Ali as my co-supervisors for their time, guidance and encouragement during conducting this research. Without all of them, this work was unable to be accomplished very well.

My deepest gratitude and thanks go to all my friends especially Fatin, Kak Renu and Afiqah who give me all the time, support and being a good listener to all my problems every single day. Million thanks to all the laboratory staffs of Faculty Science, and for their technical cooperation, knowledge, encouragement and guidance throughout this research. I am grateful to Universiti Teknologi Malaysia and Ministry of Science, Technology and Innovation Malaysia for financial support for this research as well as Ministry of Higher Education (MOHE) for MyPhD Scholarship given to me.

Last but not least, I wish to express my sincere appreciation to my husband, Helmi Samsudin and my beauty daughter Aisyah, for standing beside me. My deepest gratitude goes to my beloved parents and my parents in law for their endless prayers, and unconditional love. Thank you all for always being there and being my pillar stone. To those who indirectly contributed in this research, your kindness means a lot to me.

ABSTRACT

Biodiesel synthesized from the transesterification reaction using heterogeneous base catalyst has been extensively studied over the past decades. In this research, a series of alumina-supported catalysts were synthesized utilizing CaO and MgO via impregnation with transition metal oxides of Cu, Zn and Ni. Through the catalyst screening process, Cu/Ni/Ca/Al₂O₃ and Cu/Zn/Ca/Al₂O₃ were selected, and further studies were carried out for optimization of several reaction parameters. The optimum calcination temperature of Cu/Ni/Ca/Al₂O₃ was at 700°C, while that of Cu/Zn/Ca/Al₂O₃ was at 800°C. The ratio of co-catalyst to based for both the catalysts was 3:7:90 wt%, with two times of alumina coatings performed on the samples. Study of the surface morphology by FESEM and TEM revealed the existence of agglomerated platelet-shape particles on the catalysts surface. XRD analysis showed the crystallinity of synthesized catalysts were generally poor, with the particle sizes of less than 50 nm. The Cu/Ni/Ca(3:7:90)/Al₂O₃ catalyst with BET surface area of 140 m²/g, exhibited a higher amount of weak and moderate basic sites (4.02 mmol/g) when compared to the Cu/Zn/Ca(3:7:90)/Al₂O₃ catalyst, as obtained from the CO₂-TPD data. The optimum conditions were found as reaction temperature of 65°C, catalyst loading of 4 wt% and oil to methanol molar ratio of 1:16, to achieve 90.12% of biodiesel production for 90 minutes of reaction time, in the transesterification of refined cooking oil over the Cu/Ni/Ca(3:7:90)/Al₂O₃ catalyst. Meanwhile, the Cu/Zn/Ca(3:7:90)/Al₂O₃ with 10 wt% catalyst loading underwent 180 minutes of reaction time and subsequent achievement of 82.34% of biodiesel production. The validated data from RSM analysis indicated that the selected model was adequate with a percentage error less than 5%. Mechanistic study of the catalyst surface using FTIR and the GC-FID analysis of the transesterification product showed that both the catalysts obeyed the Langmuir mechanism rule and capable to produce the *cis* and *trans* isomers of oleic acid methyl ester. The biodiesel produced complied with the quality standard and specification recommended by the American Society for Testing Materials D6751.

ABSTRAK

Biodiesel yang disintesis daripada tindak balas transesterifikasi menggunakan mangkin bes heterogen telah dikaji secara meluas sejak berdekad yang lalu. Dalam penyelidikan ini, satu siri mangkin berpenyokong alumina telah disintesis menggunakan CaO dan MgO secara pengisitepuan oksida logam peralihan daripada Cu, Zn dan Ni. Melalui proses penyaringan mangkin, Cu/Ni/Ca/Al₂O₃ dan Cu/Zn/Ca/Al₂O₃ telah terpilih dan kajian lanjut telah dilakukan untuk pengoptimuman beberapa parameter tindak balas. Suhu pengkalsinan optimum bagi Cu/Ni/Ca/Al₂O₃ ialah pada 700°C, manakala bagi Cu/Zn/Ca/Al₂O₃ pada 800°C. Nisbah ko-mangkin kepada asas untuk kedua-dua mangkin adalah 3:7:90 wt% dengan dua kali salutan alumina. Kajian morfologi permukaan menggunakan FESEM dan TEM mendedahkan kewujudan zarah berbentuk platelet yang teraglomerat pada permukaan mangkin. Analisis XRD menunjukkan kehabluran mangkin yang disintesis pada umumnya adalah rendah, dengan saiz zarah di bawah 50 nm. Mangkin Cu/Ni/Ca(3:7:90)/Al₂O₃ dengan luas permukaan BET 140 m²/g, mempamerkan jumlah tapak bes lemah dan sederhana (4.02 mmol/g) yang lebih tinggi apabila dibandingkan dengan mangkin Cu/Zn/Ca(3:7:90)/Al₂O₃, seperti yang diperoleh dari data CO₂-TPD. Keadaan optimum adalah suhu tindak balas 65°C, muatan mangkin 4 wt% dan nisbah molar minyak kepada metanol 1:16, untuk mencapai 90.12% pengeluaran biodiesel bagi masa tindak balas 90 minit, dalam transesterifikasi minyak masak bertapis dengan menggunakan mangkin Cu/Ni/Ca(3:7:90)/Al₂O₃. Sementara itu, Cu/Zn/Ca(3:7:90)/Al₂O₃ dengan muatan mangkin 10 wt% menjalani 180 minit masa tindak balas, diikuti dengan pencapaian 82.34% pengeluaran biodiesel. Data yang disahkan daripada analisis RSM menunjukkan bahawa model yang dipilih adalah mencukupi dengan peratus ralat kurang daripada 5%. Kajian mekanistik ke atas permukaan mangkin menggunakan FTIR dan analisis produk menggunakan GC-FID menunjukkan bahawa kedua-dua mangkin mematuhi peraturan mekanisme Langmuir dan boleh menghasilkan isomer *cis* dan *trans* metil ester asid oleik. Biodiesel yang dihasilkan telah mematuhi spesifikasi dan piawaian yang diperakukan oleh Persatuan Amerika untuk Bahan Ujian D6751.

TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
	DECLARATION	ii
	DEDICATION	iii
	ACKNOWLEDGEMENT	iv
	ABSTRACT	v
	ABSTRAK	vi
	TABLE OF CONTENTS	vii
	LIST OF TABLES	xviii
	LIST OF FIGURES	xxiii
	LIST OF ABBREVIATIONS	xxxv
	LIST OF APPENDICES	xxxvi
1	INTRODUCTION	1
	1.1 Biodiesel as Alternative Energy Resources	1
	1.2 Catalysts in Biodiesel Production	5
	1.3 Response Surface Methodology (RSM)	7
	1.4 Problem Statement	8
	1.5 Objectives of the Study	10
	1.6 Scope of the Research	11
	1.7 Significant of Study	12
2	LITERATURE REVIEW	13
	2.1 Introduction	13

2.2	Magnesium oxide as Heterogeneous Base Catalyst in Transesterification Reaction	14
2.3	Calcium oxide as Heterogeneous Base Catalyst in Transesterification Reaction	18
2.4	The Influence of Transition Metal oxide over Transesterification Reaction	23
2.5	Catalyst Support	26
2.6	Mechanism of catalytic Transesterification Reaction	29
2.7	Biodiesel Feedstock	33
3	EXPERIMENTAL	37
3.1	Introduction	37
3.2	Chemicals and Reagents	37
3.3	Catalysts Preparation	38
3.4	Transesterification Reaction for Screening Process	39
3.5	Product Analysis	40
	3.5.1 SP 2560 Capillary Column	41
	3.5.2 MET-Biodiesel Column	42
3.6	Optimization Parameters of Potential Catalyst	43
	3.6.1 Co-Catalysts Ratios to Based Loadings	43
	3.6.2 Number of Alumina Coatings	43

3.6.3	Calcination Temperatures of Supported Catalyst	44
3.6.4	Reliability Testing of the Catalyst	44
3.6.5	Reproducibility of the Catalyst	45
3.6.7	Regeneration Activity of the Catalyst	45
3.6.8	Response Surface methodology (RSM) for Potential Catalyst	45
3.7	Characterization of the Potential Catalyst	48
3.7.1	Nitrogen Adsorption (NA)	48
3.7.2	Field Emission Scanning Electron Microscopy (FESEM)	49
3.7.3	Energy Dispersive X-ray (EDX)	49
3.7.4	High Resolution Transmission Electron Microscopy (HRTEM)	50
3.7.5	X-Ray Diffraction Spectroscopy (XRD)	50
3.7.6	X-ray Photoelectron Spectroscopy (XPS)	51
3.7.7	CO ₂ -Temperature Programmed Desorption (CO ₂ -TPD)	51

3.7.8	Thermogravimetry Analysis- Differential Thermal Analysis (TGA-DTA)	52
3.8	Optimization of the Catalytic Conditions Testing	53
3.8.1	Effect of Time in Transesterification Reaction	53
3.8.2	Effect of Ratio oil to methanol in Transesterification Reaction	53
3.8.3	Effect of Catalyst Loading in Transesterification Reaction	54
3.8.4	Response Surface Methodology (RSM) for Transesterification Reaction	54
3.9	Mechanistic Study	55
3.10	Verification Method for Biodiesel Production	56
3.10.1	Total Acid Number (TAN) Analysis (ASTM D664)	56
3.10.2	Flash Point (D93)	57
3.10.3	Kinematic Viscosity (D445)	58
3.10.4	Density (DMA 4100M)	59
3.10.5	Pour Point (ASTM D 97)	59
3.10.6	Cetane Index (ASTM D967- 91)	59
3.10.7	Determination of Total Glycerin	60

4	RESULTS AND DISCUSSION	61
	CATALYTIC SCREENING OF THE CATALYSTS AND OPTIMIZATION USING RSM	
4.1	Introduction	61
4.2	Catalytic Screening of Monometallic and Bimetallic Magnesium Oxide Based Catalysts	62
4.3	Catalytic Screening of Calcium Oxide Based Catalysts	64
4.3.1	Catalytic Screening of Monometallic and Bimetallic Calcium Oxide Based Catalysts	65
4.3.2	Catalytic Screening of Trimetallic Calcium Based Metal Oxides	67
4.4	Catalytic Activity over Cu/Ni/Ca/Al ₂ O ₃ Catalyst	68
4.4.1	Effect of Alumina Coating	69
4.4.2	Effect of Co-catalyst ratio to Based	70
4.4.3	Effect of Calcination Temperatures	72
4.4.4	Optimization of Cu/Ni/Ca (3:7:90)/Al ₂ O ₃ using Response Surface Methodology (RSM)	74

4.4.4.1	Regression Model and Statistical Analysis	75
4.4.4.2	Response Surface and Contour Plots	80
4.4.4.3	Optimization of Response Parameters	84
4.5	Catalytic Activity over Cu/Zn/Ca/Al ₂ O ₃ Catalyst	85
4.5.1	Effect of Alumina Coating	86
4.5.2	Effect of Co-catalyst Ratios to Based	87
4.5.3	Effect of Calcination Temperatures	89
4.5.4	Optimization of Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ using Response Surface Methodology (RSM)	90
4.5.4.1	Regression Model and Statistical Analysis	91
4.5.4.2	Response surface and Contour Plots	95
4.5.4.3	Optimization of Response Parameters	98
5	CHARACTERIZATION OF Cu/Ni/Ca/Al₂O₃ CATALYST AND BIODIESEL OPTIMIZATION	99
5.1	Introduction	99

5.2	X-ray Diffraction Analysis (XRD) over Cu/Ni/Ca/Al ₂ O ₃ Catalyst	99
5.2.1	XRD analysis at Different Calcination Temperatures	100
5.2.2	XRD analysis at Different Co- catalyst Ratios to Based	105
5.3	Nitrogen Absorption Analysis (NA)	107
5.4	Transmission Electron Microscopy (TEM)	113
5.5	X-Ray Photoelectron Spectroscopy (XPS)	119
5.6	Temperature Programmed Desorption-CO ₂ (TPD-CO ₂)	126
5.7	Field Emission Scanning Electron Microscopy - Energy Dispersive X- Ray (FESEM-EDX)	130
5.8	X-Ray Fluorescence (XRF)	136
5.9	Thermogravimetric Analysis (TGA)	137
5.10	Optimization Study in Transesterification Reaction using Cu/Ni/Ca (3:7:90)/Al ₂ O ₃ catalyst	138
5.10.1	Effect of Catalyst loadings	139
5.10.2	Effect of Methanol to oil Ratio	141
5.10.3	Effect of Reaction Time	143
5.10.4	Reusability Testing of Cu/Ni/Ca(3:7:90)/Al ₂ O ₃ catalyst	145
5.10.5	Regeneration Testing	146

	Cu/Ni/Ca(3:7:90)/Al ₂ O ₃ catalyst	
	5.10.6 Reliability Testing	146
	5.10.7 Optimization of Transesterification Reacting using RSM	148
	5.10.7.1 Regression Model and Statistical Analysis	148
	5.10.7.2 Response surface and Contour Plots	153
	5.10.7.3 Optimization of Response Parameters	155
6	CHARACTERIZATION OF Cu/Zn/Ca/Al₂O₃ CATALYST AND BIODIESEL OPTIMIZATION	157
6.1	Introduction	157
6.2	X-ray Diffraction Analysis (XRD) over Cu/Zn/Ca/Al ₂ O ₃ Catalyst	157
	6.2.1 XRD analysis at Different Calcination Temperatures	158
	6.2.2 XRD analysis at Different Co-catalyst Ratios to Based	162
6.3	Nitrogen Absorption Analysis (NA)	165
6.4	Temperature Programmed Desorption-CO ₂ (TPD-CO ₂)	172
6.5	Transmission Electron Microscopy (TEM)	175

6.6	Field Emission Scanning Electron Microscopy - Energy Dispersive X- Ray (FESEM-EDX)	182
6.7	X-Ray Fluorescence (XRF)	186
6.8	Thermogravimetric Analysis (TGA)	187
6.9	Optimization Study in Transesterification Reaction using Cu/Ni/Ca (3:7:90)/Al ₂ O ₃ catalyst	189
6.9.1	Effect of Catalyst loading	189
6.9.2	Effect of Oil to Methanol Ratio	191
6.9.3	Effect of Oil to Reaction time	193
6.9.5	Reusability Testing of Cu/Ni/Ca (3:7:90)/Al ₂ O ₃ catalyst	195
6.9.5	Regeneration Testing of Cu/Ni/Ca(3:7:90)/Al ₂ O ₃ catalyst	196
6.9.6	Reliability Testing	197
6.9.7	Optimization of Transesterification Reacting using RSM	198
6.9.7.1	Regression Model and Statistical Analysis	199
6.9.7.2	Response surface and Contour	203

	Plots	
	6.9.7.3 Optimization of Response Parameters	205
7	MECHANISTIC STUDY AND SPECIFICATION ANALYSIS OF BIODIESEL	207
7.1	Introduction	207
7.2	Mechanistic Study over Cu/Ni/Ca (3:7:90)/Al ₂ O ₃ Catalyst	207
7.2.1	Product Analysis of Cu/Ni/Ca(3:7:90)/Al ₂ O ₃ Catalyst	208
7.2.2	Mechanism on Surface Cu/Ni/Ca(3:7:90)/Al ₂ O ₃ Catalyst	211
7.3	Mechanistic Study of Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ Catalyst	214
7.3.1	Product Analysis of Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ Catalyst	214
7.3.2	Mechanism on Surface Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ Catalyst	218
7.4	Proposed Mechanism for Transesterification of Triolein using Cu/Ni/Ca (3:7:90)/Al ₂ O ₃ and Cu/Zn/Ca (3:7:90)/Al ₂ O ₃ Catalyst	220

7.5	Specification Analysis for Biodiesel Product in Transesterification of Refined cooking Oil using Cu/Ni/Ca (3:7:90)/Al ₂ O ₃ Catalyst	208
8	CONCLUSION AND RECOMMENDATIONS	227
8.1	Conclusion	227
8.2	Recommendations	230
	REFERENCES	231
	Appendices A-H	252-261

LIST OF TABLES

TABLE NO.	TITLE	PAGE
3.1	Parameter programmed for FAME identification	41
3.2	Parameter programmed for Triglycerides identification using GC-FID	42
3.3	Independents variables and factor level use in optimization of the potential catalyst	47
3.4	Independents variables and factor level use in optimization for biodiesel production	55
4.1	Biodiesel production over mono and bimetallic alumina supported magnesium oxide based catalyst calcined at 800°C for 5 hours, one time alumina coating at 65°C of reaction temperature, 3 hours of reaction time, 1:16 of ratio oil to methanol and 6 wt% of catalyst loadings	62
4.2	Production of biodiesel over monometallic and bimetallic alumina supported calcium oxide based catalysts calcined at 800°C for 5 hours, one time alumina coating at 65°C of reaction temperature, 3 hours of reaction time, 1:16 of ratio oil to methanol and 6 wt% of catalyst loading.	65

4.3	Production of biodiesel over trimetallic alumina supported calcium oxide based catalyst calcined at 800°C for 5 hours, one time alumina coating at 65°C of reaction temperature, 3 hours of reaction time, 1:16 of ratio oil to methanol and 6 wt% of catalyst loading.	67
4.4	The coded level of the independent variables over Cu/Ni/Ca/Al ₂ O ₃	77
4.5	ANOVA results of the response surface quadratic model for biodiesel production over Cu/Ni/Ca/Al ₂ O ₃	85
4.6	The optimum parameter conditions for maximum biodiesel production	85
4.7	The coded level of the independent variables	93
4.8	ANOVA results of the response surface quadratic model for biodiesel production	95
4.9	The optimum parameter condition for biodiesel production using Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ catalyst	98
5.1	Crystallite size of Cu/Ni/Ca(3:7:90)/Al ₂ O ₃ catalysts calcined at different calcination temperatures for 5 hours with two times of alumina coatings	104
5.2	Crystallite size over Cu/Ni/Ca/Al ₂ O ₃ calcined at 700°C with different Co-catalyst ratios to based	106

5.3	Surface area, average pre diameter and pore volume for Cu/Ni/Ca/Al ₂ O ₃ at different calcination temperatures and deferent co-catalyst loading and calcined for 5 hours with two times alumina coatings	107
5.4	Binding energy elements species obtained over Cu/Ni/Ca(3:7:90)/Al ₂ O ₃ catalysts calcined at 600°C, 700°C and 800°C for 5 hours	121
5.5	CO ₂ desorbed temperature and basic sites amount of Cu/Ni/Ca(3:7:90)/Al ₂ O ₃ catalysts at different calcination temperatures and co-catalyst loading with two times alumina coatings	129
5.6	Elemental composition by EDX analysis of Cu/Ni/Ca/Al ₂ O ₃ catalyst calcined at different calcination temperature and co-catalyst loadings	135
5.7	XRF data for calculated and as prepared catalyst (actual detected by XRF) for Cu/Ni/Ca (3:7:90)/Al ₂ O ₃ with two times alumina coatings	137
5.8	The coded level of the independent variables	149
5.9	Summarize of ANOVA analysis data for independent and dependant variables	152
5.10	The optimum parameter condition for biodiesel production using Cu/Ni/Ca(3:7:90)/Al ₂ O ₃ catalyst calcined at 700°C for 5 hours with two times alumina coatings	155
6.1	Crystallite size over Cu/Zn/Ca(3:7:90)/Al ₂ O ₃	161

	catalysts at different calcination temperatures for 5 hours with two times alumina coatings	
6.2	Crystallite size over Cu/Zn/Ca/Al ₂ O ₃ catalysts calcined at 800°C, two times alumina coatings and in different co-catalyst ratios to based	164
6.3	Surface areas, average pre diameter and pore volume for Cu/Zn/Ca/Al ₂ O ₃ at different calcination temperatures and deferent co-catalyst loadings calcined for 5 hours with two times alumina coatings	165
6.4	The amount of CO ₂ desorbed temperature and basic sites amount of Cu/Zn/Ca/Al ₂ O ₃ catalysts at different calcination temperatures and co-catalyst loadings calcined for 5 hours with two times alumina coatings	173
6.5	Elemental composition by EDX analysis of Cu/Zn/Ca (3:7:90)/Al ₂ O ₃ at different calcination temperature for 5 hours with two times alumina coatings	184
6.6	XRF data for element presence between nominal and actual (identified by XPS) for Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ catalyst	187
6.7	BBD matrix of three independent variables along with experimental and predicted response over Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ catalyst	200
6.8	Summarize of ANOVA analysis data for independent and dependent variables over Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ catalyst	203

6.9	The optimum parameter condition for biodiesel production using Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ catalyst	206
7.1	Percentage production of oleic acid methyl ester (FAME) and peak identification using Cu/Ni/Ca(3:7:90)/Al ₂ O ₃ catalyst calcined at 700°C for 5 hours with two times alumina coatings	208
7.2	Percentage production of oleic acid methyl ester (FAME) and peak identification using Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ catalyst calcined at 800°C for 5 hours with two times alumina coatings	216
7.3	Specification analysis of biodiesel in transesterification of refined cooking oil using Cu/Ni/Ca(3:7:90)/Al ₂ O ₃ calcined at 700°C for 5 hours and two times alumina coatings	224

LIST OF FIGURES

FIGURE NO.	TITLE	PAGE
3.1	Reflux and distillation processes in a transesterification reaction	40
4.1	Effect of alumina coatings for Cu/Ni/Ca(3:7:90)/Al ₂ O ₃ catalyst calcined at 800°C for 5 hours, at 65°C of reaction temperature, 3 hours of reaction time, 1:16 of ratio oil to methanol and 6 wt% of catalyst loading.	69
4.2	Effect of dopant and co-dopant ratios to based for Cu/Ni/Ca/Al ₂ O ₃ calcined at 800°C for 5 hours, two times alumina coatings at 65°C of reaction temperature, 3 hours of reaction time, 1:16 of ratio oil to methanol and 6 wt% of catalyst loading.	71
4.3	The effect of calcination temperatures over Cu/Ni/Ca(3:7:90)/Al ₂ O ₃ calcined for 5 hours with two times alumina coatings at 65°C of reaction temperature, 3 hours of reaction time, 1:16 of ratio oil to methanol and 6 wt% of catalyst loading.	73

4.4	Fit plot of regression model for biodiesel production from the experimental design over Cu/Ni/Ca/Al ₂ O ₃	78
4.5	3D and 2D plot for a) and b) interaction between calcination temperature and co-catalyst ratio to based c) and d) interaction between calcination temperature and numbers of alumina coating, e) and f) interaction between co-catalyst ratio to based and numbers of alumina coating	82
4.6	Effect of alumina coatings over Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ catalyst calcined at 800°C, at 65°C of reaction temperature, 3 hours of reaction time, 1:16 of ratio oil to methanol and 6 wt% of catalyst loading	86
4.7	Effect of co-dopant, dopant to based for Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ catalyst calcined at 800°C for 5 hours with two times alumina coatings at 65°C of reaction temperature, 3 hours of reaction time, 1:16 of ratio oil to methanol and 6 wt% of catalyst loading	88
4.8	Effect of calcination temperatures on Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ catalyst calcined for 5 hours with two times alumina coatings at 65°C of reaction temperature, 3 hours of reaction time, 1:16 of ratio oil to methanol and 6 wt% of catalyst loading	89

4.9	Fit plot of regression model for biodiesel production from the experimental design	92
4.10	3D and 2D plot for a) and b) interaction between calcination temperature and co-catalyst ratio to based c) and d) interaction between calcination temperature and numbers of alumina coating, e) and f) interaction between co-catalyst ratio to based and numbers of alumina coatings	97
5.1	XRD diffractograms of Cu/Ni/Ca(3:7:90)/Al ₂ O ₃ catalysts at different calcination temperatures of a) 600°C ; b) 700°C , c) 800°C and 1000°C for 5 hours with two times alumina coatings	101
5.2	XRD diffractograms of Cu/Ni/Ca/Al ₂ O ₃ catalysts at different co-catalyst ratios to based a) Cu/Ni/Ca(2:8:90), b) Cu/Ni/Ca(3:7:90) and c) Cu/Ni/Ca(4:6:90) at calcination temperature of 700°C for 5 hours with two times alumina coatings	105
5.3	Pore size distribution plot for Cu/Ni/Ca(3:7:90)/Al ₂ O ₃ at calcination temperature of a) 600°C, b) 700°C, c) 800°C and d) 1000°C calcined for 5 hours with two times alumina coatings	109
5.4	Isotherm linear plots at different for Cu/Ni/Ca(3:7:90)/Al ₂ O ₃ at calcination temperature of a) 600°C, b) 700°C, c) 800°C	110

	and d) 1000°C calcined for 5 hours with two times alumina coatings	
5.5	Pore distribution plots for Cu/Ni/Ca/Al ₂ O ₃ calcined at 700°C for 5 hours with different co-catalyst loadings of a) 2:8:90, b) 3:7:90 and c) 4:6:90 with two times alumina coatings	112
5.6	Isotherm linear plots for Cu/Ni/Ca/Al ₂ O ₃ at different co-catalyst loading at calcination temperature 700°C calcined for 5 hours with two times alumina coatings	113
5.7	TEM images of Cu/Ni/Ca(3:7:90)/Al ₂ O ₃ catalyst calcined at a) 600°C, b) 700°C and c) 800°C for 5 hours with two times alumina coatings	114
5.8	HRTEM image of Cu/Ni/Ca (3:7:90)/Al ₂ O ₃ catalyst calcined at 600°C, for 5 hours, a) Al ₂ O ₃ (400), b) CaO (200) and c) NiO (200) with two times alumina coatings	116
5.9	HRTEM image of Cu/Ni/Ca (3:7:90)/Al ₂ O ₃ catalyst calcined at 700°C, for 5 hours with two times alumina coatings, a) Al ₂ O ₃ (400), b) CaO (200) and c) NiO (200) with two times alumina coatings	117
5.10	HRTEM image of Cu/Ni/Ca (3:7:90)/Al ₂ O ₃ catalyst calcined at 800°C, for 5 hours with two times alumina coatings, a) Al ₂ O ₃ (400), b) CaO (200) and c) NiO (200) d) CaAl ₄ O ₇ (-243) calcined for 5 hours with two times	119

	alumina coatings.	
5.11	Wide Scan XPS spectrum for Cu/Ni/Ca/Al ₂ O ₃ catalysts calcined at a) 600°C, b) 700°C and c) 800°C for 5 hours with two times alumina coatings	120
5.12	XPS results for different types of elements (Al, O, Ca, Ni and Cu) obtained over Cu/Ni/Ca(3:7:90) Al ₂ O ₃ catalyst calcined at a) 600°C, b) 700°C and c) 800°C for 5 hours with two times alumina coatings	124
5.13	CO ₂ -TPD curves for Cu/Ni/Ca (3:7:90)/Al ₂ O ₃ catalyst at calcination temperatures of a) 600°C, b) 700°C and c) 800°C for 5 hours with two times alumina coatings	127
5.14	CO ₂ -TPD curves for Cu/Ni/Ca/Al ₂ O ₃ catalyst at co-catalyst loading of a) Cu/Ni/Ca (2:8:90)/Al ₂ O ₃ , b) Cu/Ni/Ca(3:7:90)/Al ₂ O ₃ and c) Cu/Ni/Ca(4:6:90)/Al ₂ O ₃ calcined at 700°C for 5 hours with two times alumina coatings	130
5.15	FESEM micrograph of catalyst a) Cu/Ni/Ca(3:7:90)/Al ₂ O ₃ calcined at 600°C, b) Cu/Ni/Ca(3:7:90)/Al ₂ O ₃ calcined at 700 °C, c) Cu/Ni/Ca(3:7:90)/Al ₂ O ₃ calcined at 800°C, d) Cu/Ni/Ca(2:8:90)/Al ₂ O ₃ calcined at 700°C and e) Cu/Ni/Ca(4:6:90)/Al ₂ O ₃ calcined at 700°C	131

5.16	EDX mapping image of Cu/Ni/Ca (3:7:90)/Al ₂ O ₃ catalyst calcined at 700°C for 5 hours. ((a: alumina compound), (b: oxygen compound), (c: calcium species), (d: copper species) and (e: Nickel species)	134
5.17	TGA analysis of as prepared Cu/Ni/Ca(3:7:90)/Al ₂ O ₃ catalyst with two times alumina coatings	138
5.18	Effect of catalyst loading on biodiesel production (%) in the presence of Cu/Ni/Ca (3:7:90)/Al ₂ O ₃ catalyst calcined at 700°C with oil to methanol molar ratio of 1:16, reaction temperature of 65°C and reaction time of 60 minutes	140
5.19	Effect of oil to methanol ratio in the presence of Cu/Ni/Ca(3:7:90)/Al ₂ O ₃ catalyst calcined at 700°C with 4 wt% catalyst loading, reaction temperature of 65°C and reaction time of 60 minutes	142
5.20	Effect of reaction time in the presence of Cu/Ni/Ca (3:7:90)/Al ₂ O ₃ catalyst calcined at 700°C for 5 hours, two times alumina coating with 4 wt% catalyst loading, reaction temperature of 65°C and 1:16 molar ratio oil to methanol	144
5.21	Reusability testing of Cu/Ni/Ca (3:7:90)/Al ₂ O ₃ catalyst calcined at 700°C , two times alumina coatings with 4 wt%	145

	catalyst loading, reaction temperature of 65°C, 1:16 molar ratio oil to methanol and 90 minutes reaction time	
5.22	Reliability testing of Cu/Ni/Ca(3:7:90)/Al ₂ O ₃ catalyst calcined at 700°C with 4 wt% catalyst loading, reaction temperature of 65°C, 1:16 molar ratio oil to methanol and 90 minutes reaction time	147
5.23	Fit plot of regression model for biodiesel production from the experimental design	151
5.24	3D and 2D surface contour plots of the relation between dependant and independent variable over Cu/Ni/Ca/Al ₂ O ₃	154
6.1	XRD diffractograms of Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ catalysts at different calcination temperatures of a)700°C, b) 800°C, c) 900°C and d) 1000°C for 5 hours with two times alumina coatings	158
6.2	XRD diffractograms of Cu/Zn/Ca/Al ₂ O ₃ catalysts at 800°C with different co-catalyst ratios to based calcined for 5 hours with two times alumina coatings	163
6.3	Pore size distribution plot of Cu/Zn/Ca (3:7:90)/Al ₂ O ₃ at calcination temperatures of a) 700°C; b) 800°C; c) 900°C and d) 1000°C, calcined for 5 hours with two times alumina coatings	167

6.4	Isotherm linear plots of Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ at calcination temperatures of a) 700°C; b) 800°C; c) 900°C and d) 1000°C, calcined for 5 hours with two times alumina coatings	168
6.5	Pore size distribution plots calcined at 800°C co-catalyst with co-catalyst loading of a) Cu/Zn/Ca(2:8:90)/Al ₂ O ₃ ; b) Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ and c) Cu/Zn/Ca(4:6:90)/Al ₂ O ₃ calcined for 5 hours with two times alumina coatings	170
6.6	Isotherm linear plots of Cu/Zn/Ca/Al ₂ O ₃ calcined at 800°C with co-catalyst loadings of a) Cu/Zn/Ca(2:8:90)/Al ₂ O ₃ ; b) Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ and c) Cu/Zn/Ca(4:6:90)/Al ₂ O ₃ calcined for 5 hours with two times alumina coatings	171
6.7	CO ₂ -TPD curves at different calcination temperatures and co-catalyst ratios to based of a) Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ (700°C), b) Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ (800°C), c) Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ (900°C), d) Cu/Zn/Ca(2:8:90)/Al ₂ O ₃ (800°C) and e) Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ (800°C)	172
6.8	TEM images (50 nm scale) of Cu/Zn/Ca (3:7:90)/Al ₂ O ₃ catalyst calcined at a) 700°C, b)800°C and c) 900°C for 5 hours with two times alumina coating	177

6.9	TEM images of Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ catalyst calcined at 700°C, for 5 hours with two times alumina coatings; a) Al ₂ O ₃ (4,0,0) plane and b) CaO (2,0,0) plane	178
6.10	TEM images of Cu/Zn/Ca (3:7:90)/Al ₂ O ₃ catalyst calcined at 800°C, for 5 hours with two times alumina coatings; a) Al ₂ O ₃ (4,0,0), and b) CaO (2,0,0)	179
6.11	TEM images of Cu/Zn/Ca (3:7:90)/Al ₂ O ₃ catalyst calcined at 900°C, for 5 hours with two times alumina coatings; a) Al ₂ O ₃ (400) plane, b) CaO (200) plane , c) CaAl ₂ O ₁₉ (108) plane and d) ZnAl ₉₄ O ₁₄₄ (103) plane	181
6.12	FESEM micrograph of catalyst a) Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ calcined at 700°C with two times alumina coatings, b) Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ calcined at 800°C, c) Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ calcined at 900°C for 5 hours.	183
6.13	EDX mapping image of Cu/Zn/Ca (3:7:90)/Al ₂ O ₃ catalyst calcined at 800°C for 5 hours with two times alumina coatings; a: alumina compound; b: oxygen compound; c: calcium species; d: zinc species and e copper species	185
6.14	TGA analysis for Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ catalyst (as prepared) with two times alumina coatings	188

6.15	Effect of catalyst loading on biodiesel production (%) in the presence of Cu/Zn/Ca (3:7:90)/Al ₂ O ₃ catalyst calcined at 800°C with oil to methanol molar ratio of 1:16, reaction temperature of 65°C and the reaction time of 60 minutes.	190
6.16	Effect of oil to methanol ratio in the presence of Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ catalyst calcined at 800°C with 10 wt% catalyst loading, reaction temperature of 65°C and reaction time of 60 minutes.	192
6.17	Effect reaction time in the presence of Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ catalyst calcined at 800°C, two times alumina coatings with 10 wt% catalyst loading, reaction temperature of 65°C and 1:16 molar ratio of oil to methanol.	194
6.18	Reusability testing of Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ catalyst calcined at 800°C with 10 wt% catalyst loading, the reaction temperature of 65°C, 1:16 molar ratio oil to methanol and 180 minutes of reaction time	195
6.19	Reliability testing of Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ catalyst calcined at 800°C, two times alumina coatings with 10 wt% catalyst loading, the reaction temperature of 65°C 1:16 molar ratio of oil to methanol and 180 minutes reaction time.	198

6.20	Fit plot of the regression model for biodiesel production from the experimental design over Cu/Zn/Ca/Al ₂ O ₃ catalyst	201
6.21	3D and 2D surface contour plots of the relation between dependent and independent variables over Cu/Zn/Ca/Al ₂ O ₃ catalyst	204
7.1	GC chromatogram of <i>cis</i> and <i>trans</i> oleic acid methyl ester using Cu/Ni/Ca(3:7:90)/Al ₂ O ₃ catalyst calcined at 700°C for 5 hours with two times alumina coating.	209
7.2	FTIR spectra for transesterification reaction of triolein and methanol in the presence of Cu/Ni/Ca (3:7:90)/Al ₂ O ₃ catalyst calcined at 700°C for 5 hours with two times alumina coating.	212
7.3	GC chromatogram of <i>cis</i> and <i>trans</i> oleic acid methyl esters using Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ catalyst calcined at 800°C for 5 hours with two times alumina coating.	217
7.4	FTIR spectra for transesterification reaction of triolein and methanol in the presence of Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ catalyst calcined at 800°C for 5 hours with two times alumina coating.	219

LIST OF ABBREVIATIONS

ANOVA	Analysis of Variance
2D	Two Dimensional
3D	Three Dimensional
BBD	Box-Behnken Design
BET	Brunauer-Emmet-Teller
c	cubic
FESEM-EDX	Field Emission Scanning Electron Microscope - Energy Dispersive X-Ray
FID	Flame Ionization Detector
FTIR	Fourier Transform Infrared Spectroscopy
GC	Gas Chromatography
h	Hexagonal
JCPDS	Joint Committee on Powder Diffraction Standard
RSM	Response Surface Methodology
TAN	Total Acid Number
TGA-DTA	Thermogravimetry Analysis-Differential Thermal Analysis
TPD	Temperature Programmed Desorption
XPS	X-Ray Photoelectron Spectroscopy
XRD	X-Ray Diffraction
NA	Nitrogen Adsorption
RSM	Response Surface Methodology
TEM	Transmission Electron Microcopy

LIST OF APPENDICES

APPENDIX	TITLE	PAGE
A	Conceptual and Operational Research Framework	252
B	Calculation for catalyst preparation	253
C	Calculation for oil to methanol molar ratio	
D	Peaks assignment in the XRD patterns over Cu/Ni/Ca(3:7:90)/Al ₂ O ₃ catalyst calcined at 600°C, 700°C, 800°C and 1000°C for 5 hours with two times alumina coatings	255
	Peaks assignment in the XRD patterns of Cu/Ni/Ca/Al ₂ O ₃ catalyst at various co-catalyst ratios to based and calcined at 700°C, for 5 hours with two times alumina coatings	257
E	Peaks assignment in the XRD patterns over Cu/Zn/Ca(3:7:90)/Al ₂ O ₃ catalyst calcined at 700°C, 800°C, 900°C and 1000°C calcined for 5 hours with two times alumina coatings	258
F	Peaks assignment in the XRD patterns over Cu/Zn/Ca/Al ₂ O ₃ catalyst calcined at 800°C with different co-catalyst ratio to based	260
G		
H	Publications and Presentation	261

CHAPTER 1

INTRODUCTION


1.1 Biodiesel as Alternative Energy Resources

Fossil fuel was naturally produced from organic matter that decays deep in the earth over the course of millions years (Droege *et al.*, 2002). Since the industrial development was started, a large quantity of fossil fuel was utilized to drive the economy to huge number of people (Shafiee *et al.*, 2009). From the data analysis in global energy statistical 2017, petroleum oil is one of the most fossil fuel resources that are widely used in Malaysia especially in transportation. Thus, it is estimated that world crude oil reserves will vanish at the rate of 4 billion tons a year and it has become increasingly evident that humanity faces a number of unprecedented challenges in terms of future energy resources and consumption (Atabani *et al.*, 2012).

On the other hand, the usage of petroleum based fossil fuel (petro diesel) may leads to the several disadvantageous. The combustion of petro diesel may releases the greenhouse gases to the environmental surrounding and contributes to the global warming. The emission from the combustion can produce nitrogen oxide (NO_x), sulphur oxide (SO_x) and aromatic particulates which harmed the human health (Zhong *et al.*, 2017). Therefore, several researches

were conducted to solve this critical issue by searching new alternative energy resources which were technically feasible, economically competitive, environmentally acceptable, and readily available. Above all, biodiesel is one of the best renewable energy resources to substitute the petro diesel and contribute more advantageous due to environmentally benign.

Biodiesel which are derived from vegetable oil and animals fats through transesterification reaction has become one of the renewable energy resources that have similar properties as petro diesel. The reaction takes place when one mole of triglycerides (contain in vegetable oil and animal fats) reacted with 3 mole of methanol in the presence of catalyst (heterogeneous or homogeneous acid, basic or enzymatic) to produced three mole of methyl ester (biodiesel) and 1 mole of glycerol. The overall reaction is presented as in Equation 1.1.

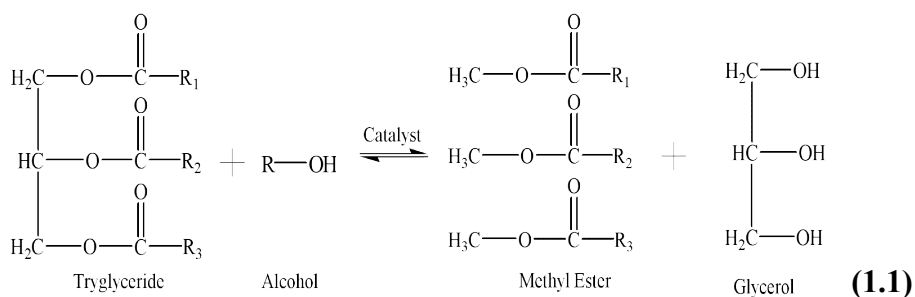

Biodiesel is a liquid fuel usually stated as B100 was in un-homogenised form. Like petroleum diesel, biodiesel was used as fuel in compression ignition engines. It has frequently used as a blend with regular diesel fuel and can be used in several diesel vehicles

without any engine modification. The most common biodiesel blend is B20, which was the combination of 6% to 20% biodiesel blended with petroleum diesel. Meanwhile, B5 (5% biodiesel, 95% diesel) was commonly used in fleets.

There were several advantageous of using biodiesel as petro diesel substitution. For example, it can improve the fuel lubricity and raises the cetane number of the fuel. The diesel engines depend upon the lubricity of the fuel to stay moving components from wearing untimely. Besides that, the emissions from the biodiesel were better than regular diesel and produced less NO_x gases. In addition, it is also easy to use and less vehicle modification or any fuelling equipment was needed. Moreover, from environmental side of view, biodiesel is helping in reducing pollution and improve health by lowering the emission of CO₂ thus may reduces the effect of global warming. Moreover, it is also safer to handle due to less toxic and easy to be stored compared to petro diesel.

In producing biodiesel, the feedstock was the major reactant that has to be taken into account before the transesterification reaction takes place. There were several feedstocks that have been used in order to produce high quality of biodiesel. Previous study proved that the biodiesel can be synthesize from palm oil, canola oil, sunflower oil, corn oil, rice bran oil and rapeseed oil (Canakci *et al.*, 2008). However, the production of biodiesel from first generation vegetable oil has a limitation issues. The crisis was raised up due to the competing with arable land culture and human food supply. Due to this problem, the idea of using non edible feedstock (second

generation of biodiesel) was generated since it may not give any negative impact especially for human and more environmental friendly.

Synthesized of biodiesel from non edible feedstock or known as second generation biodiesel was becoming a new idea to solve this crucial crisis (Mardhiah *et al.*, 2017). The biodiesel was synthesis from the whole plant matter, agricultural residue and processing waste has become the main attention among researchers. For example, there were studies that use microalgae plants as the feedstock to produce biodiesel (Chiaramonti *et al.*, 2017). Besides that, the use of rice husk, oil palm leave, palm kernel and *Jatropha Curcas* was also reported to have a potential in producing a biodiesel (Karmakar *et al.*, 2010). However, the production was not reached the industrial scale especially for commercialization due to the source limitation.

Along with that, feedstock from waste cooking oil has been generating a new idea to produce biodiesel. It was due to the large quantities of waste cooking oils and animal fats generated throughout the country (Sudhir *et al.*, 2007). Management of oils and fats was a significant challenge due to the disposal problems which leads to the contamination of the water and land resources (Chhetry *et al.*, 2008). Even though some of this waste cooking oil is used for soap production, a major part of it was being discharged into the environment. Therefore in this study, refined cooking oil was introduced as the feedstock to produce biodiesel and offers

significant advantages due to the reduction in environmental pollution and lowers in production cost.

1.2 Catalysts in Biodiesel Production

In transesterification reaction, the process involved both endothermic and reversible reaction. It can be carried out either in catalytic or non catalytic approach. It has been recognised that the catalyst acts by reducing the activation energy along the reaction pathway. The lower the activation barrier, the faster the reaction will takes place. Thus, the usage of catalyst was necessary in order to increase the production rate and saving the production time. In normal reaction, the catalyst was required to shift the equilibrium to the right and produce high production of biodiesel. Various catalysts were used in transesterification reaction such as heterogeneous, homogeneous and enzymatic catalyst. In addition, the catalyst can also be basic or acidic depends on the catalytic reaction and the mechanism pathway might be different (Atadashi *et al.*, 2013)

Homogeneous catalyst was widely used especially in industrial development due to the better performance with lower FFA content in the feedstock. Large amount of FFA (>1%) in the system may neutralized the basic catalyst and leads to the formation of soap and water (Ramachandran *et al.*, 2013). In addition, homogeneous base catalysts mainly dissolved in glycerol and alcohol after the reaction was completed. It cannot be recycled for

the following batches and the purification process with water was needed. Thus, it may leads to the waste water problem which was harmful to the environmental (Thanh *et al.*, 2012).

Since the homogeneous catalyst leads to the several crises, thus heterogeneous catalyst was synthesis to substitute the using of homogeneous catalyst. Heterogeneous catalyst can be categorized as basic and acidic depends on the nature of the catalyst itself. In previous studies, heterogeneous catalyst such as metal oxide, zeolite and hydrotalcites catalyst was extensively used due to the ability to be separated from the final product and can be reused back in the next transesterification reaction (Kiakalaieh *et al.*, 2013). Most of these catalysts were alkaline metal oxides supported on materials with a large surface area and have high basicity (Wittoon *et al.*, 2014). Similar properties to homogeneous catalyst, solid base-catalysts are more active as compared to solid acid-catalysts.

In this study, the performance of bimetallic and trimetallic alumina supported basic catalyst was evaluated in transesterification of refined cooking oil to produce biodiesel. The catalyst was prepared via wetness impregnation method by incorporating the transition metal elements like copper (Cu), Nickel (Ni) and zinc (Zn) as dopant and co dopant. Meanwhile, calcium (Ca) and magnesium (Mg) was selected as the based and supported on gamma alumina. The development of this catalyst was rarely explored especially in transesterification reaction. Thus, it may become the advantage for this research to synthesis new catalyst which was lower in production cost and more environmental friendly.

1.3 Response Surface Methodology (RSM)

In this study, the experimental was done to determine the optimum condition of the catalyst prepared and transesterification reaction condition to produce high biodiesel production. Thus, in order to validate this optimization study, another tools was used which is called response surface methodology (RSM) analysis. RSM is defined as a collection of mathematical and statistical techniques for empirical model building. The objective is to optimize a response (output variable) which was influenced by several independent variables (input variables). An experiment is a series of tests, called runs, in which changes are made in the input variables in order to identify the reasons for changes in the output response. There are two popular experimental designs that generally applied which are the central composite design (CCD) and the Box-Behnken design (BBD). Both designs are built up from simple factorial or fractional factorial designs.

RSM had been extensively used by many researchers in a wide variety of fields for process optimization. However, there still lack of research in the study of RSM on the trimetallic catalyst in the transesterification reaction of biodiesel. Thus, in this study, RSM was applied in order to check the suitability of the technique to optimize the catalytic performance of trimetallic alumina supported catalyst reaction and the transesterification reaction condition was evaluated using BBD. The BBD was selected since it is an economical design with high efficiency and requires only three levels for each factor (the optimum conditions for each variable). It

was used in RSM and validates the optimal conditions obtained from laboratory experiments.

1.4 Problem Statement

Biodiesel was one of the renewable energy resources that gave a better substitution from the usage of petro diesel. However, there were several challenges that have been noticed in the production of biodiesel like type of feedstock, catalyst used in the biodiesel synthesis and quality of biodiesel due to the leaching effect of the metal. Thus, this limitation leads to the research to be conducted in order to find the solution for the crisis that has been faced.

As mention earlier, previous research has synthesized the biodiesel using edible oil from vegetable and animal fats which leads to the competition with food consumption for human supply. Therefore, employing refined waste feedstock or non edible oil was become the main idea to overcome this crisis. Thus, in this study refined cooking oil (refined from the used cooking oil) was selected as feedstock to produce biodiesel in the presence of heterogeneous basic catalyst. Besides it can solve the competition with food supply, it also may lower down the production cost as compared from using edible oil.

Currently, many type of heterogeneous catalysts such as monometallic alkaline earth metal oxides supported on alumina have been reported to be catalyzing in transesterification reactions. However, the monometallic based metal oxides may cause leaching effect of metal into the reaction systems and reduce the quality of the biodiesel. Besides that, the basicity of the single oxide was lower and leads to the low biodiesel production. Thus, in order to solve these issues, the bimetallic and trimetallic supported catalyst was synthesize by using calcium (Ca) and magnesium (Mg) as based and incorporated with nickel (Ni), copper (Cu) and zinc (Zn). The modification of the catalyst may reduce the leaching effect due to the strong interaction between metal oxides and increase the degree of basicity for the catalyst that leads to the increasing of biodiesel production.

On the other hand, the usage of support in synthesizing the heterogeneous catalyst was an important for the catalyst to perform at the highest potential. In previous, zeolites present severe limitations when engage with the large molecules of reactant. It has a narrow and uniform micropore size distribution due to their crystallographically defined pore system (Taguchi and Schuth, 2005). In order to overcome the existing problem, the pursuit of solid base catalyst has been recently focused on mesoporous gamma alumina supported catalyst due to very high surface area, uniformity in pore size and high thermal stability which promise great opportunity for application as catalysts and catalytic supports. Thus in this study, series of alumina supported mixed metal oxide was

synthesis and used in transesterification of refined cooking oil to produce high quality of biodiesel.

1.5 Objectives of the Study

The main goal of this research was to develop a new heterogeneous basic catalyst that can be used in transesterification reaction of refined cooking oil effectively at optimum conditions. The objectives of this research were:-

1. To synthesize the alumina supported calcium and magnesium oxides based catalysts for transesterification of refined cooking oil.
2. To screening and optimize the performance of prepared catalysts in transesterification reaction under normal reflux condition.
3. To characterize the catalysts in order to understand the chemical and physical properties of the catalysts.
4. To study the mechanistic reaction involve over potential catalysts and verified the biodiesel obtained according to American Standard Testing Material (ASTM) using potential catalyst

1.6 Scope of the Research

This research was focused on synthesis higher biodiesel production from refined cooking oil using alumina supported calcium (Ca) and magnesium (Mg) oxides based catalysts while, copper (Cu), nickel (Ni) and zinc (Zn) as dopants and co-dopants. The catalyst was prepared using nitrate salt via wetness impregnation method. After that, all the catalysts were screening in the transesterification reaction using refined cooking oil and methanol as reactant to produce methyl ester and glycerol and measured by gas chromatography-flame ionization detector (GC-FID) analysis. From the screening process, the highest potential catalyst and less potential catalyst was selected and were optimized according to the number of alumina coating, co-catalyst loading and calcination temperatures, reliability, reusability and regeneration testing. The optimum conditions over the two catalysts were validated by response surface methodology (RSM) via Box-Behnken design (BBD). It were then characterized by using various techniques in order to understand the physical properties of the catalysts such as X-ray diffraction (XRD) analysis for bulk structure, field emission scanning electron microscope-energy dispersive X-ray (FESEM-EDX) for morphology and elemental composition study, transmission electron microcopy (TEM) for particle size, nitrogen adsorption (NA) for pore texture and surface area of the catalyst. Meanwhile, thermal gravimetric analysis (TGA) was also performed to study the mass loss of the catalyst during temperature change while, the active surface components and reducibility of the catalysts were investigated using X-ray photoelectron spectroscopy

(XPS) and CO₂-temperature programmed desorption (CO₂-TPD). Furthermore, the mechanistic study occurred in product and on the surface of the catalyst was evaluated using GC-FID and FTIR-ATR. Lastly, the biodiesel produce using the best catalyst was selected and verified to study the properties of the biodiesel according to the American Standard Testing Material (ASTM).

1.7 Significance of Study

Biodiesel can be synthesized from edible and non edible oil of vegetable and animal fats. However, in order to solve the competition with human food supply this research was conducted using refined cooking oil as feedstock which were more easily obtained and more feasible to be employed in large scale production. Besides that, the catalyst prepared for this study was categorized as heterogeneous basic catalysts which were more stable, low in production cost and can be recycled. Thus this study was significant to be conducted and the novelties of this research study could be listed as follows:

1. The development of highly basic metal oxide catalysts from transition metal (Cu, Ni and Zn) and alkaline earth metal (Ca and Mg) as based catalysts.
2. The usage of refined cooking oil as feedstock in producing biodiesel
3. The postulated mechanism deduced from the most potential catalyst.

REFERENCES

- Abdullah, S.H,Y.S., Hanapia, N.H.M. , Azida, A., Umara, R., Juahira, H., Khatoon, H. and Enduta, A. (2017). A review of biomass-derived heterogeneous catalyst for a sustainable biodiesel production. *Renewable and Sustainable Energy Reviews*. 70:1040-1051.
- Abebe, K., Endalew, Y., Zanzi, R. (2011). Inorganic heterogeneous catalysts for biodiesel production from vegetable oils. *Biomass and bioenergy*. 35: 3787-3809.
- Abreu, W.C.D., Carla, V.R., Costac, C.S. and Moura, M. E. (2017). Strontium and Nickel Heterogeneous Catalysts for Biodiesel Production from Macaw Oil. *Journal brazil chemistry society*. 28: 319-327.
- Adam, N. and Shanableh, A. (2015). Comparison of Biodiesel Production from a Variety of Feedstocks. Third International Conference on Water,Energy and Environmental. 1-6.
- Alejandre, A., Medina, F., Salagre, P., Fabregat, A. and Sueiras, J.E. (1998). Characterization and activity of copper and nickel catalysts for the oxidation of phenol aqueous solutions. *Applied catalysis B: Environmental*. 18: 307-315.
- Amadine, O., Essamiali, Y., Fihri, A., Larzek, M. and Zahouily, M. (2017). Effect of calcination temperature on the structure and catalytic performance of copper–ceria mixed oxide catalysts in phenol hydroxylation. *Royal Society of Chemistry*. 7: 12586-12597.

- Amani, H., Ahmad, Z. and Hameed, B.H. (2014). Synthesis of fatty acid methyl esters via the methanolysis of palm oil over $\text{Ca}_{3.5}\text{xZr}_{0.5}\text{yAlxO}_3$ mixed oxide catalyst. *Renewable Energy*. 66:680-685.
- Ashraful, A.M., Masjuki, H.H. Kalam, M.A., Rizwanul, F.I.M., Imtenan, S., Shahir, S.A., Mobarak, H.M.(2014). Production and comparison of fuel properties, engine performance, and emission characteristics of biodiesel from various non-edible vegetable oils: A review. *Energy Conversion and Management*. 80:202-228.
- Atabani, A.E., Silitonga, A.S., Badruddin, I.A., Mahlia, T.M.I., masjuki, H.H., Mekhilef, S. (2012). A comprehensive review on biodiesel as an alternative energy resource and its characteristics. *Renewable and Sustainable Energy Reviews*. 2070-2093.
- Atadashi, I.M., Aroua, M.K., Aziz, A.R.A. and Sulaiman N.M.N. (2013). The effects of catalysts in biodiesel production: A review. *Journal of Industrial and Engineering Chemistry*. 19: 14-26.
- Avhad, M.R. and Marchetti, J.M. (2015). A review on recent advancement in catalytic materials. *Renewable and Sustainable energy Reviews*. 50:
- Babak, S., Iman, H. and Abdullah, A.Z. (2013). Alkaline Earth Metal Oxide Catalysts for Biodiesel Production from Palm Oil: Elucidation of Process Behaviors and Modeling Using Response Surface Methodology. *Iranian Journal Of Chemistry & Chemical Engineering-International English Edition*. 32: 113-126.

- Bakar, W.A.W.A., Ali, R. and Toemen, S. (2011). Catalytic methanation reaction over supported nickel–ruthenium oxide base for purification of simulated natural gas. *Transaction C: Chemistry and Chemical Engineering*. 19: 525-534.
- Baskar, G. and Aiswarya, R. (2015). Biodiesel Production from waste Cooking oil using Copper Doped Zinc Oxide Nanocomposite as heterogeneous Catalyst. *Bioresource Technology*. 188: 124-127.
- Baskar, G. and Soumiya, S. (2016). Production of biodiesel from castor oil using iron (II) doped zinc oxide nanocatalyst. *Renewable energy*. 98: 101-107.
- Baskar, G., Aiswarya, R., Soumiya, S., Mohanapriya, N. and Nivetha. S. R. (2017). Recent Advances in Heterogeneous Catalysts for Biodiesel Production. *Journal of Energy and Environmental Sustainability*. 4: 1-5.
- Behcet, R., Oktay, H., Cakmak, A. and Aydin, H. (2015). Comparison of exhaust emissions of biodiesel–diesel fuel blends produced from animal fats. *Renewable and Sustainable Energy Reviews*. 46: 157-165.
- Benjapornkulapong, S., Ngamcharussrivicha, C. and Bunyakiat, K. (2015). Al₂O₃-Supported Alkali and Alkali Earth Metal Oxides for Transesterification of Palm Kernel and Coconut Oil. *Chemical Engineering Journal*. 145; 468-474.
- Borges, M.E. and Diaz, L. (2012). Recent developments on heterogeneous catalysts for biodiesel production by oil esterification and transesterification reactions: A review. *Renewable and sustainable energy review*. 16:2839-2849.

- Buchori, L., Istadi, I., Purwanto, P., Marpaung, L.C. and Safitri, R.L. (2018). Roles of K_2O on the CaO - ZnO Catalyst and Its Influence on Catalyst Basicity for Biodiesel Production. Web of Conferences. 1-4.
- Canakci, M. and Sanli, H. (2008). Biodiesel production from various feedstocks and their effects on the fuel properties. *Journal industrial microbial Biotechnology*. 35:431-441.
- Chang, F.W., Kuo, M.S., Tsay, M.T. and Hsieh, M.C. (2003). Hydrogenation of CO_2 over nickel catalysts on rice husk ash-alumina prepared by incipient wetness impregnation. *Applied Catalysis*. 247: 309-320.
- Chang, K.L., Lin, Y.C., Jhang, S.R., Cheng, W.L., Chen, S.C. and Mao, S.Y. (2017). Rapid Jatropha-Castor Biodiesel Production with Microwave Heating and a Heterogeneous Base Catalyst Nano- $Ca(OH)_2/Fe_3O_4$. *Catalysts*. 1-15.
- Chelladurai, K. and Rajamanickam, M. (2015). Synthesis and Catalytic Activity of Nano Hydrotalcite with different Cations (Zn, Ni, Cu) for Transesterification of Vegetable Oil. *International Journal of Chemtech Research*. 8: 422-433.
- Chhetri, A.B., Watts, K. C. and Islam, M. R. (2008). Waste Cooking Oil as an Alternate Feedstock for Biodiesel Production. *Energies*. 1:3-18.
- Chiaramonti, D., Prussi, M., Buffi, M., Rizzo, M. and Pari, L. (2017). Review and experimental study on pyrolysis and hydrothermal liquefaction of microalgae for biofuel production. *Applied Energy*. 185: 963-972.
- Chumuang, N. and Punsuvon, V. (2017). Response Surface Methodology for Biodiesel Production Using Calcium

- Methoxide Catalyst Assisted with Tetrahydrofuran as Cosolvent. *Journal of Chemistry*. 1-10.
- Dai , Y.M., Wua, J.S., Chen, C.C. and Chen, K.T.(2015). Evaluating the optimum operating parameters on transesterification reaction for biodiesel production over a LiAlO₂ catalyst. *Chemical Engineering Journal*. 280:370-376.
- Demirbas, A. (2008). Comparison of transesterification methods for production of biodiesel from vegetable oils and fats. *Energy Conversion and management*. 49:125-130.
- Droege, P. (2002). Renewable Energy and the City: Urban Life in an Age of Fossil Fuel Depletion and Climate Change. *Bulletin of science, Technology and society*. 22: 87-99.
- Fan, X., Chen, F. and Wang, X. (2010). Ultrasound-assisted Synthesis of Biodiesel from Crude Cottonseed Oil Using Response Surface Methodology. *Journal of Oleo Science*. 5: 235-241.
- Gaber, A., Rahim, M.A.A., Latief, A., Salam, M.N.A. (2014). Influence of Calcination Temperature on the Structure and Porosity of Nanocrystalline SnO₂ Synthesized by a Conventional Precipitation method. *International Journal of Elechtrochemical Science*. 9: 81-95.
- Gang, L., Anderson, B.G., Grondelle, J.V., Santen, R.A.V., Gennip, W.J.H.V., Niemantsverdriet, J.W., Kooyman, P.J., Knoester, A. and Brongersma, H.H. (2002). Alumina-Supported Cu–Ag Catalysts for Ammonia Oxidation to Nitrogen at Low Temperature. *Journal of Catalysis*. 206: 60-70.
- Ghozatloo, A., Hajjar, Z., Niassar, M.S. and Rashidi, A.M. (2015). Application of Box Behnken Design to Optimize the

- Parameters to Synthesis Graphene by CVD Process. *Journal of Chemical and Petroleum Engineering*. 2:91-99.
- Gulum, M. and Bilgin, A. Density , Flash point and heating value variations of corn oil biodiesel-diesel fuel blends. *Fuel Processing Technology*. 134: 456-464.
- Gurunathan, B. and Ravi, A. (2015). Process optimization and kinetics of biodiesel production from neem oil using cooper doped zinc oxide heterogeneous nanocatalyst. *Bioresource Technology*. 190: 424-426.
- Hajjaria, M., Tabatabaieia, M., Aghbashlo, M. and Ghanavati, H.(2017). A review on the prospects of sustainable biodiesel production: A global scenario with an emphasis on waste-oil biodiesel utilization. *Renewable and Sustainable Energy Reviews*. 72.445-464.
- Hamze, H., Akia, M. and Yazdani, F. (2015). Optimization of Biodiesel Production from the waste cooking Oil using Response Surface Methodology. *Process safety and environmental Protection*. 94: 1-10.
- Hasni, K., Ilham, Z. Dharma, S. and Varman, M. (2017). Optimization of biodiesel production from Brucea javanica seeds oil as novel non-edible feedstock using response surface methodology. *Energy Conversion and Management*. 149. 392-400.
- Helwani, Z., Othman, M.R., Aziz, N. and Kim, J. (2009). Fernando Solid heterogeneous catalysts for transesterification of triglycerides with methanol: A review. *Applied catalysis A: General*. 363:1-10.

- Helwani, Z., Othman, M.R., Aziz, N., Kim, J. and Fernando, W.J.N. (2009). Solid heterogeneous catalysts for transesterification of triglycerides with methanol: A review. *Applied Catalysis A: General*. 363: 1-10.
- Islam, A., Yap, Y.H.T., Ravindra, P., Teo, S.H., Sivasangar, S. and Chan, E.S. (2015). Biodiesel synthesis over millimetric γ - Al_2O_3 /KI catalyst. *Energy*. 89: 565-573.
- Jindapon, W., Jaiyen, S. and Ngamcharussrivicha, C. (2016). Seashell-derived mixed compounds of Ca, Zn and Al as active and stable catalysts for the transesterification of palm oil with methanol to biodiesel. *Energy Conversion and Management*. 122: 535-543.
- Kabo, K.S., Yacob, A.R., Bakar, W.A.W.A., Buang, N.A., Bello, A.M. and Ruskam, A. (2015). BBD Optimization of K-ZnO Catalyst Modification Process for Heterogeneous Transesterification of Rice Bran Oil to Biodiesel. *Material Science and Engineering*. 136: 1-12.
- Kamal, N., Bakar, W.A.W.A.B and Ali, R. (2017). Catalytic optimization and physicochemical studies over Zn/Ca/ Al_2O_3 catalyst for transesterification of low grade cooking oil. *Energy Conversion and Management*. 137:113-120.
- Karmakar, A., Karmakar, S., and Mukherjee, S. (2010). Properties of various plants and animals feedstocks for biodiesel production. *Bioresource Technology*. 101:7201-7210.

- Kesic, Z., Lukic, I., Zdujic, M., Mojovic, L. and Skala, D. (2016). Calcium Oxide Based Catalysts for Biodiesel Production: A Review. *Chemical Industry and Chemical Engineering Quarterly*. 22: 391-408.
- Kiakalaieh, A.T., Amin, N. A. S. and Mazaheri, H. (2013). A review on novel processes of biodiesel production from waste cooking Oil. *Applied Energy*. 104: 683-710.
- Knothe, G. and Steidley, K.R. (2005). Kinematic viscosity of biodiesel fuel components and related compounds. Influence of compound structure and comparison to petrodiesel fuel components. *Fuel*. 84: 1059-1065.
- Kouzu, M., and Hidaka, J.S. (2012). Transesterification of vegetable oil into biodiesel catalyzed by CaO: A review. *Fuel*. 93: 1-12.
- Kowalik, P. and Prochnik, W. (2010). The effect of calcination temperature on properties and activity of Cu/ZnO/Al₂O₃ catalysts. 8:79-87.
- Bournay, L., Casanave, D., Delfort, B., Hillion, G. and Chodorge, J.A. (2005). New heterogeneous process for biodiesel production: A way to improve the quality and the value of the crude glycerine produced by biodiesel plants. *Catalysis today*. 106: 190-192.
- Lam, M.K., Lee, K.T., and Mohamed, A.R. (2010). Homogeneous, heterogeneous and enzymatic catalysis for transesterification of high free fatty acid oil (waste cooking oil) to biodiesel: A review. *Biotechnology Advances*. 28: 500-518.
- Lee, H.V., Juan, J. C, Yap, Y.H.T, Kong, P.S. and Rahman, N.A. (2015). Advancement in heterogeneous base catalyzed

- technology: An efficient production of biodiesel fuels. *Journal of Renewable and Sustainable Energy*. 7:1-47.
- Lee, H.V., Yap, Y.H.T. Yunus, M.Z.H.R. (2013). Transesterification of jatropha oil with methanol over Mg–Zn mixed metal oxide catalysts. *Energy*. 49:12-18.
- Lee, H.V., Yap, Y.H.T., Hussein, M.Z. and Yunus, R. (2013). Transesterification of jatropha oil with methanol over Mg–Zn mixed metal oxide catalysts. *Energy*. 49:12-18.
- Leung, D.Y.C., Wu, X. and Leung, M.K.H. (2010). A review on biodiesel production using catalyzed transesterification. *Applied Energy*. 87:1083-1095.
- Levi, P. and Cullen, J.M. (2018). Mapping Global Flows of Chemicals: From Fossil Fuel Feedstock to Chemical Products. *Environmental Science & Technology*. 1-25.
- Li, H., Lu, S.N.C and Li, J. (2016). Calcium oxide functionalized with strontium as heterogeneous transesterification catalyst for biodiesel production. *Fuel*. 176:63-71.
- Li, L., han, W., Zong, L., Tang, Z. and Zhang, J. (2017). Controlled pore size of ordered mesoporous Al₂O₃-supported Mn/Cu catalysts for CO oxidation. *Microporous and Mesoporous Materials*. 249: 1-9.
- Li, P., Lu, S., Shan, T., Mou, Y., Li, Y., Sun, W. and Zhou, L. (2012). Extraction Optimization of Water-Extracted Mycelial Polysaccharide from Endophytic Fungus *Fusarium oxysporum* Dzf17 by Response Surface Methodology. *Molecular Sciences*. 13: 5441-5453.
- Liao, Y., Li, F., Pu, Y., Wang, F., Dai, X., Zhou, N. and Xiao, F. (2018). Solid Base catalysts derived from Ca–Al–X (X=F, Cl-

- and Br-) layered double hydroxides for methanolysis of propylene carbonate. *Royal society and advances*. 8: 785-791.
- Liu, C., Liu, Y., Ma, Q. and He, H. (2010). Mesoporous transition alumina with uniform pore structure synthesized by aluminosol spray pyrolysis. *Chemical Engineering Journal*. 163: 133-142.
- Liu, W., Wen, Z. and Cui, G. (2015) Preparation of Ca/Zr mixed oxide catalysts through a birch-templating route for the synthesis of biodiesel via transesterification. *Fuel*. 158: 176-182.
- Lu, H., Yu, X., Yang, S., Yang, H. and Tu, S.T. (2015). MgO–Li₂O catalysts templated by a PDMS–PEO comb-like copolymer for transesterification of vegetable oil to biodiesel. *Fuel*. Article in press.
- Ma, A., Yazdani, F., Motaee, E., Han, D. and Arandiyan, H. (2014). A review on conversion of biomass to biofuel by nanocatalysts. *Biofuel*. 1:16-25.
- Ma, Y., Wang, Q., Zheng, L., Gao, Z., Wang, Q. and Ma, Y. (2016). Mixed methanol/ethanol on transesterification of waste cooking oil using Mg/Al hydrotalcite catalyst. *Energy*. 107: 523-531.
- Mahmudul, H.M, Hagos, F.Y., Mamat, R., Adam, A.A., Ishak, W.F.W. and Alenezi, R. (2017). Production, characterization and performance of biodiesel as an alternative fuel in diesel engines – A review. *Renewable and Sustainable Energy Reviews*. 72: 497-509.
- Maleki, H. and Kazemeini, M. (2017). Transesterification of canola oil over Li/Ca-La mixed oxide catalyst: Kinetics and calcination temperature investigations. 45:442-448.

- Marchetti, J.M., Miguel, V.U. and Errazu, A.F. (2007). Possible methods for biodiesel production. *Renewable and Sustainable Energy Reviews*. 11:1300-1311.
- Mardhiah, H.H., Ong, C.H., Masjuki, H.H., Lim, S. and Lee, H.V. (2017). A review on latest developments and future prospects of heterogeneous catalyst in biodiesel production from non-edible oils. *Renewable and sustainable Energy Reviews*. 67:1225-1236.
- Margellou, A., Koutsoukia, A., Petrakisa, D., Vaimakisa, T., Manos, G., Kontominasa, M. and Pomonis, P.J. (2018). Enhanced production of biodiesel over MgO catalysts synthesized in the presence of Poly-Vinyl-Alcohol (PVA). *Industrial Crops & Products*. 114: 146-153.
- Marinkovic, D.M., Avramovic, J.M., Stankovic, M.V., Stamenkovic, O.S., Jonakovic, D.M. and Veljkovic, V.B. (2017). Synthesis and characterization of spherically-shaped $\text{CaO}/\gamma\text{-Al}_2\text{O}_3$ catalyst and its application in biodiesel production. *Energy Conversion and Management*. 144: 399-413.
- Marino, F., Baronetti, G., Jobbagy, M. and Laborde, M. (2003). Cu-Ni-K/_- Al_2O_3 supported catalysts for ethanol steam reforming Formation of hydrotalcite-type compounds as a result of metal-support interaction. *Applied Catalysis A: General*. 238:41-54.
- Martínez, N.G., Martínez, P.A., Medina, J.Q., Ríos, A.P.D.L., Chica, A., Ruiz, R.B., Abril, J.C. (2017). Optimization of non-catalytic transesterification of tobacco (*Nicotiana tabacum*) seed oil using supercritical methanol to biodiesel production. *Energy Conversion and Management*. 131: 99-108.

- Mauralidhar, R.V., Chirumamila, R.R., Marchant, R. and Nigam, P. (2001). A response surface approach for the comparison of lipase production by *Candida cylindracea* using two different carbon sources. *Biochemical Engineering Journal*. 9: 17-23.
- Milano, J., Onga, H.C., Masjukia, H.H., Silitonga, A.S., Chene, W.H., Kusumoa, F.S., Sebayang, A.H.(2018). Optimization of biodiesel production by microwave irradiation-assisted transesterification for waste cooking oil-Calophyllum inophyllum oil via response surface methodology. *Energy Conversion and Management*. 158:400-415.
- Mishra, V.K. and Goswami, R. (2017). A review of production, properties and advantages of biodiesel. *Biofuels*. 1-18.
- Moushoul, E.B., Farhadi, K., Mansourpanah, Y., Nikbakht, A.M., Molaei, R. and Forough, M. (2016). Application of CaO-based/Au nanoparticles as heterogeneous nano-catalysts in biodiesel production. *Fuel*. 164: 119-127.
- Mutreja, V., Singh, S. and Ali, A., (2011). Biodiesel from mutton fat using KOH impregnated MgO as heterogeneous catalysts. *Renewable Energy*. 36: 2253-2258.
- Mutreja, V., Singh, S. and Ali, A. (2014). Potassium impregnated nanocrystalline mixed oxides of La and Mg as heterogeneous catalysts for transesterification. *Renewable energy*. 62: 226-233.
- Nandiwale, K.Y., Galande, N.D. and Bokade, V.V. (2015). Process optimization by response surface methodology for transesterification of renewable ethyl acetate to butyl acetate biofuel additive over borated USY zeolite. *Royal Society of Chemistry*. 5: 17109-17116.

- Nasreen, S., Nafees, M., Jaffar, M.M., Qurashi, L.a., Tabraiz, S. and Khan, R. (2017). Comparison and effect of Cinder supported with Manganese and Lanthanum oxides for biodiesel production. *International Journal of Hydrogen Energy*. 42: 18389-18396.
- Nayebzaded, H., Saghatoleslami, N. and Tabasizadeh, M. (2017). Application of Microwave Irradiation for Preparation of a KOH/Calcium Aluminate Nanocatalyst and Biodiesel. *Chemical Engineering Technology*. 1826-1834.
- Nezahat Boz & Miray Kara. (2008). Solid Base Catalyzed Transesterification of Canola Oil. *Chemical Engineering Communications*. 196:80-92.
- Nyoman Puspa Asri^{1,2+}, Santi Diyah Savitri¹, Suprpto¹, Kusno Budikarjono¹ and Achmad Roesyadi. (2012). Development of Heterogeneous Alumina Supported Base Catalyst for Biodiesel Production. *International Conference on Biology, Environment and Chemistry*. 46: 116-121.
- O'Neill, B.C., Kriegler, E., Ebi, K. L ., Benedict, E.K., Riahi, K., . Rothman, D. S., Ruijven, B.J.van., Vuuren, D.P.van., Kok, K., Birkmann, J., Levy, M. and Solecki, W. (2017). The roads ahead: Narratives for shared socioeconomic pathways describing world futures in the 21st century. *Global Environmental Change*. 169-180.
- Oh, Y.K., Hwang, K.R., Changman, K., Kim, J.R. and Lee, J.S. (2018). Recent developments and key barriers to advanced biofuels: A short review. *Bioresource Technology*. Article in press.

- Onukwuli, D.O., Emembolu, L.N., Ude, C.N., Aliozo, S.O. and Menkiti, M.C. (2017). Optimization of Biodiesel Production from Refined Cotton seed oil and its Characterization. *Egyptian Journal of Petroleum*. 26: 103-110.
- Palash, S.M., Masjuki, H.H., Kalam, M.A., Atabani, A.E., Fattah, I.M.R. and Sanjid, A. (2015). Biodiesel production, characterization, diesel engine performance, and emission characteristics of methyl esters from *Aphanamixis polystachya* oil of Bangladesh. *Energy Conversion and Management*. 91: 149-157.
- Pandiangan, K.D., Jamarun, N., Arief, S., Simanjuntak, W. and Rilyanti, M. (2016). The Effect of Calcination Temperatures on the Activity of CaO and CaO/SiO₂ Heterogeneous Catalyst for Transesterification of Rubber Seed Oil In the Presence of Coconut Oil as a Co-reactant. *Oriental Journal of Chemistry*. 32: 3021-3026.
- Pang, D., Tan, H., Zhu, R. and Ouyang, F. (2017). Producing Biodiesel from Waste Animal Oil by Modified ZnO. *International Journal of Green Chemistry*. 1-39.
- Pasupulety, N., Rempel, G.I. and Ng, T.T. (2015). Studies on Mg-Zn mixed oxide catalyst for biodiesel production. *Applied catalysis A: General*. 489:77-85.
- Patel, S. and Pant, K.K. (2006). Activity and stability enhancement of copper–alumina catalysts using cerium and zinc promoters for the selective production of hydrogen via steam reforming of methanol. *Journal of Power Sources*. 159: 139-143.

- Petro, J., Bota, A., Lazslo, K., Beyer, H., Kalman, E. and Dodony, I. (2000). A new alumina-supported, not pyrophoric Raney-type Ni-catalyst. *Applied Catalysis A*. 190: 73-86.
- Rahmani, F., Haghighi, M. and Mahboob, S. (2016). CO₂-enhanced dehydrogenation of ethane over sono chemically synthesized Cr/clinoptilolite-ZrO₂ nanocatalyst: Effects of ultrasound irradiation and ZrO₂ loading on catalytic activity and stability. *Ultrasonic Sonochemistry*. 33: 150-163.
- Ramachandran, K., Suganya, T., Gandhi, N. N. and Renganathan, S. (2013). Recent developments for biodiesel production by ultrasonic assist transesterification using different heterogeneous catalyst: A review. *Renewable and Sustainable Energy Reviews*. 22: 410-418.
- Ramli, A. and Farooq, M. (2015). Optimization Of Process Parameters For The Production Of Biodiesel From Waste Cooking Oil In The Presence Of Bifunctional Al₂O₃-CeO₂ Supported Catalysts. *Malaysian Journal of Analytical Sciences*. 19: 8-19.
- Ravanchi, M.T., Fard, M.R., Fadaeeraeyeni, S. and Yaripour, F. (2015). Effect of Calcination Conditions on Crystalline Structure and Pore Size Distribution for Mesoporous Alumina. *Chemical Engineering Communications*. 493-499.
- Sepehri, S., Rezaei, M., Garbarino, G. and Busca, G. Facile synthesis of a mesoporous alumina and its application as a support of Ni-based autothermal reforming catalysts. *International Journal of Hydrogen Energy*. 41: 3456-3464.
- Shafiee, S. and Topal, E. (2009). When Will Fossil Fuel reserves be diminished? *Energy policy*. 37: 181-189.

- Shin, H.U., Abutaleb, A., Lolla, D. and Chase, G. (2017). Effect of Calcination Temperature on NO–CO Decomposition by Pd Catalyst Nanoparticles Supported on Alumina Nanofibers. *Fibers*. 5: 1-14.
- Silitonga, A.S., Masjuki, H.H., Ong, H.C., Yusaf, T., Kusumo, F. and Mahlia, T.M.I. (2016). Synthesis and optimization of *Hevea brasiliensis* and *Ricinus Communis* as feedstock for biodiesel production : A comparative study. *Industrial Crops and Products*. 85: 274-286.
- Singh, D., Bhoi, R., Ganesh, A. and Mahajani, S. (2014). Synthesis of Biodiesel from Vegetable Oil Using Supported Metal Oxide Catalysts. *Energy and Fuel*. 2743-2753.
- Sirisomboonchai, S., Abuduwayiti, M., Guan, G., Samart, C., Abliz, S., Hao, X., Katsuki, K. and Abudula, A. (2015). Biodiesel production from waste cooking oil using calcined scallop shell as catalyst. *Energy Conversion and Management*. 95: 242-247.
- Su, M., Yang, R. and Li, M. (2013). Biodiesel production from hempseed oil using alkaline earth metal oxides supporting copper oxide as bi-functional catalysts for transesterification and selective hydrogenation. *Fuel*. 103: 398-417.
- Sudhir, C.V., N.Y. Sharma¹ and P. Mohanan. (2007). Potential Of Waste Cooking Oils As Biodiesel Feed Stock. *Emirates Journal for Engineering Research*. 3: 69-75.
- Sudsakorn, K., Saiwuttikul, S., Palitsakun, S., Seubsai, A. and Limtrakul, J. (2017). Biodiesel Production from *Jatropha Curcas* Oil Using Strontium-doped CaO/MgO Catalyst. *Journal of Environmental and Chemical Engineering*. 17: 1-28.

- Sun, L., Tuo, J., Zhang, M., Wu, C., Wang, Z. and Zheng, Y. (2015). Formation and development of the pore structure in Chang 7 member oil-shale from Ordos Basin during organic matter evolution induced by hydrous pyrolysis. *Fuel*. 158: 549-557.
- Tahvildari, k., Anaraki, Y.N., Fazaeli, R., Mirpanji, S. and Delrish, E. (2015). The study of CaO and MgO heterogenic nano-catalyst coupling on transesterification efficacy in the production of biodiesel from recycled cooking oil. *Journal of Environmental health Science and Engineering*. 13: 2-9.
- Tan, M., Wang, X., Wang, X., Zou, X., Ding, W. and Lu, X., Influence of calcination temperature on textural and structural properties, reducibility, and catalytic behavior of mesoporous γ -alumina-supported Ni-Mg oxides by one-pot template-free route. *Journal of Catalysis*. 329: 151-166.
- Tantirungrotechai, J., Thepwatee, S. and Yoosuk, B. (2013). Biodiesel synthesis over Sr/MgO solid base catalyst. *Fuel*. 106: 279-284.
- Tantirungrotechai, J., Thepwatee, S. and Yoosul, B. (2013). Biodiesel synthesis over Sr/MgO solid base catalyst. *Fuel*. 106: 279-284.
- Teeo, S.H., Rashid, U., Choong, T. and Yap, T. (2017). Heterogeneous calcium-based bimetallic oxide catalyzed transesterification of *Elaeis guineensis* derived triglycerides for biodiesel production. *Energy Conversion and Management*. 141: 20-27.
- Teo, S.H., Yap, Y.H.T. and Ng, F.I. (2014). Alumina supported/unsupported mixed oxides of Ca and Mg as heterogeneous catalysts for transesterification of

- Nannochloropsis sp. microalga's oil. *Energy conversion and management*. 1-7.
- Thanh, L.T., Okitsu, K., Boi, L.V. and Maeda, Y. (2012). Catalytic Technologies for Biodiesel Fuel Production and Utilization of Glycerol: A Review. *Catalysts*. 2:191-122.
- Thomas J. Davison,^a Chinedu Okoli,^d Karen Wilson,^b Adam F. Lee,^b Adam Harvey,^c Julia Woodford^b and Jhuma Sadhukhan. (2013). Multiscale modelling of heterogeneously catalysed transesterification reaction process: an overview. *RSC Advances*. 3:6226-6240.
- Thommes,M., Kaneko,K., Neimark, A.V., Oliver, J.P., Reinoso, F.R., Rouquerol, J. and Sing, K.S.W. (2015). Physisorption of gases, with special reference to the evaluation of surface area and pore size distribution (IUPAC Technical Report). *Pure Applied Chemistry*. 1-19.
- Thyssen, V.V., Maia, T.A. and Assaf, E.M. (2015). Cu and Ni Catalysts Supported on γ -Al₂O₃ and SiO₂ Assessed in Glycerol Steam Reforming Reaction. *Journal of Brazil Chemical Society*. 26: 22-31.
- Vyas,A.P., Verma, J.L. and Subrahmanyam,N. (2011). Effects of Molar Ratio, Alkali Catalyst Concentration and Temperature on Transesterification of Jatropha Oil with Methanol under Ultrasonic Irradiation. *Advances in Chemical Engineering and Science*. 1;45-50.
- Wen, Z., Yu, X., Tu, S.T., Yan, J. and Dahlquist, E. (2010). Synthesis of biodiesel from vegetable oil with methanol catalyzed by Li-doped magnesium oxide catalysts. *Applied Energy*. 87:743-748.

- Wen,Z., Yu, X., Tu, S.T., Yan, J. and Dahlquist, E. (2010). Synthesis of biodiesel from vegetable oil with methanol catalyzed by Li-doped magnesium oxide catalysts. *Applied Energy*. 87; 743-748.
- Witoon, T., Bumrungsalee, S., Vathavanichkul, P., Palitsakun, S., Saisriyoot, M. and Faungnawakij, K. (2014). Biodiesel production from transesterification of palm oil with methanol over CaO supported on bimodal meso-macroporous silica catalyst. *Bioresource Technology*. 156: 329-334.
- Wong, Y.C., Tan, Y.P., Yap, Y.H.T., Ramli, I. and Tee, H.S. (2015). Biodiesel production via transesterification of palm oil by using CaO–CeO₂ mixed oxide catalysts. *Fuel*. 162:288-293.
- Wong, Y.C., tan, Y.P., Yap, Y.h.T. and Ramli, I. (2015). An Optimization Study for Transesterification of Palm Oil using Response Surface Methodology (RSM). *Sains Malaysianna*. 44: 281-290.
- Wu, W., Mingming, Z. and Zhang, D. (2016). An Experimental and Kinetic Study of Canola Oil Transesterification Catalyzed by Mesoporous Alumina Supported Potassium. *Applied Catalysis*. 1-31.
- Wu, W., Zhu, M. and Zhang, D. (2017). An experimental and kinetic study of canola oil transesterification catalyzed by mesoporous alumina supported potassium. *Applied Catalysis A: General*. 530: 166-173.
- Xie,W. and Li,H. (2006). Alumina-supported potassium iodide as a heterogeneous catalyst for biodiesel production from soybean oil. *Journal of Molecular Catalysis*. 255: 1-9.

- Xue, B.J., Luo, J., Zhang, F. and Fang, Z. (2014). Biodiesel production from soybean and *Jatropha* oils by magnetic $\text{CaFe}_2\text{O}_4/\text{Ca}_2\text{Fe}_2\text{O}_5$ -based catalyst. *Energy*. 68: 584-591.
- Yadav, G.D. and Yadav, A.R. (2014). Synthesis of ethyl levulinate as fuel additives using heterogeneous solid superacidic catalyst: Efficacy and kinetic modelling. *Chemical Engineering Journal*. 1-37.
- Yahya N.Y., Ngadi, N., Jusoh, M. and Halim, N.A.A. (2016). Characterization and parametric study of mesoporous calcium titanate catalyst for transesterification of waste cooking oil into biodiesel. *Energy Conversion and Management*. 129:275-283.
- Yan, S., Kim, M., Salley, S.O. and Ng, K.Y.S. (2009). Oil transesterification over calcium oxides modified with lanthanum. *Applied Catalysis A: General*. 360: 163-170.
- Yap, Y.H.T., Lee, H.V., Hussein, M.Z. and Yunus, R (2011). Calcium Based Mixed Metal oxide catalyst for methanolysis of *Jatropha Curcas* oil to biodiesel. *Biomass and Bioenergy*. 35: 827-834.
- Yusuf, N.N.A.N., Kamarudin, S.K., and Yaakub, Z. (2011). Overview on the current trends in biodiesel production. *Energy Conversion and Management*. 52:2741-2751.
- Yusuf, N.N.A.N., Kamarudin, S.K. and Yaakub, Z. (2011). Overview on the current trends in biodiesel production. *Energy Conversion and Management*. 52:2741-2751.
- Yusuff, A.S., Adeniyi, O.D., Olutoye, M.A. and Akpan, U.G. (2017). A Review on Application of Heterogeneous Catalyst in the Production of Biodiesel from Vegetable Oils. *Journal of Applied Science and Process Engineering*. 4: 142-157.

- Zhang, L., Wang, X., Chen, C., Zou, X., Shang, X., Ding W. and Lu, X. (2017). Investigation of mesoporous $\text{NiAl}_2\text{O}_4/\text{MO}_x$ ($\text{M} = \text{La}, \text{Ce}, \text{Ca}, \text{Mg}$)- $\text{g-Al}_2\text{O}_3$ nanocomposites for dry reforming of methane. *Royal Society of Chemistry*. 7: 33143-33154.
- Zhao, L., Qiu, Z. and Williams, S.M.S. (2013). Transesterification of canola oil catalyzed by nanopowder calcium oxide. *Fuel Processing technology*. 114: 154-162.
- Zhong, W., An, H., Shen, Lei., Fang, W., Gao, X. and Dong, Di. (2017). The roles of countries in the international fossil fuel trade: An energy and network analysis. *Energy Policy*. 100: 365-376.